

CTX5L-BS ART. NR.: GB.5041277

Specifications


Model NO.		CTX5L-BS DIN:50412 ETN:GEL504012003
Same Dimensions As YUASA Model		YTX5-BS
Nominal Voltage		12V
Rated Capacity (10 hours rate)		4 AH
Dimension	Length	114 mm (4.49 inches)
	Width	71 mm (2.80 inches)
	Height	106 mm (4.17 inches)
	Total Height	106mm (4.17 inches)
Approx. Wight		Approx. 2.16kg (2.55Lbs)
Charge Current (A)		0.5A



Characteristics

Capacity 25°C (77°F)	10hours rate (0.5 A to 10.5V)	5.0 Ah
	5hours rate (1.0 A to 10.2V)	4.3Ah
	1C (5.0 A to 9.6V)	2.3Ah
	3C (15 A to 9.6V)	1.8Ah
Cold Cranking Amperes(-18°C EN Standard)		130A
Internal Resistance (at 1KHz)		Approx.7.5m Ω
Operating Temperature Range	Charge	0°C (32°F) to 40°C (104°F)
	Discharge	-15°C (5°F) to 50°C (122°F)
	Storage	-15°C (5°F) to 40°C (104°F)
Life Expectancy (Cycle Use)	100% depth of discharge 200 cycles	
	80% depth of discharge 225 cycles	
	50% depth of discharge 500 cycles	
Charge Retention (shelf life) at 20°C (68°F)	1 month	92%
	3 month	90%
	6 month	80%
Standby Use	3~5 years	
Case Material	ABS	

Dimensions

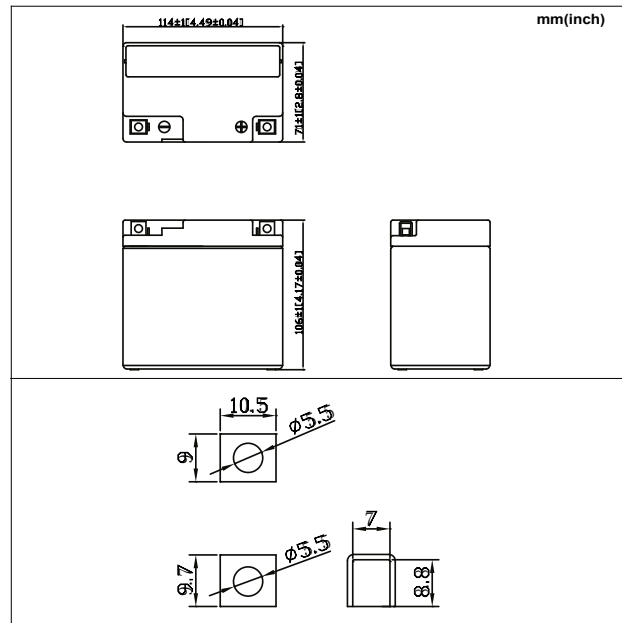

(V) FOR 12V BATTERY

Discharge Time VS. Discharge Current(25°C)

