

ART. NR.: GB.5081277 008

ETN: GEL 508 0 12 008

DIN: 50812

CTX9-BS

Specifications


Model NO .	CTX9-BS	
Same Dimensions As YUASA Model	YTX9-BS	
Nominal Voltage	12V	
Rated Capacity (10 hours rate)	8 AH	
Dimension	Length	151 mm (5.94 inches)
	Width	87 mm (3.43 inches)
	Height	105 mm (4.13 inches)
	Total Height	105mm (4.13 inches)
Approx. Wight	Approx. 3.5kg (7.72Lbs)	
Charge Current (A)	0.9A	



Characteristics

Capacity 25°C (77°F)	10hours rate (0.9 A to 10.5V)	9.0 Ah
	5hours rate (1.8 A to 10.2V)	7.65Ah
	1C (9.0 A to 9.6V)	4.05Ah
	3C (27.0 A to 9.6V)	3.24Ah
Cold Cranking Amperes(-18°C EN Standard)		80 A
Internal Resistance (at 1KHz)		Appox 8.0mΩ
Operating Temperature Range	Charge	0°C (32°F) to 40°C (104°F)
	Discharge	-15°C (5°F) to 50°C (122°F)
	Storage	-15°C (5°F) to 40°C (104°F)
Life Expectancy (Cycle Use)	100% depth of discharge 200 cycles	
	80% depth of discharge 225 cycles	
	50% depth of discharge 500 cycles	
Charge Retention (shelf life) at 20°C (68°F)	1 month	92%
	3 month	90%
	6 month	80%
Standby Use	3~5 years	
Case Material	ABS	

Dimensions

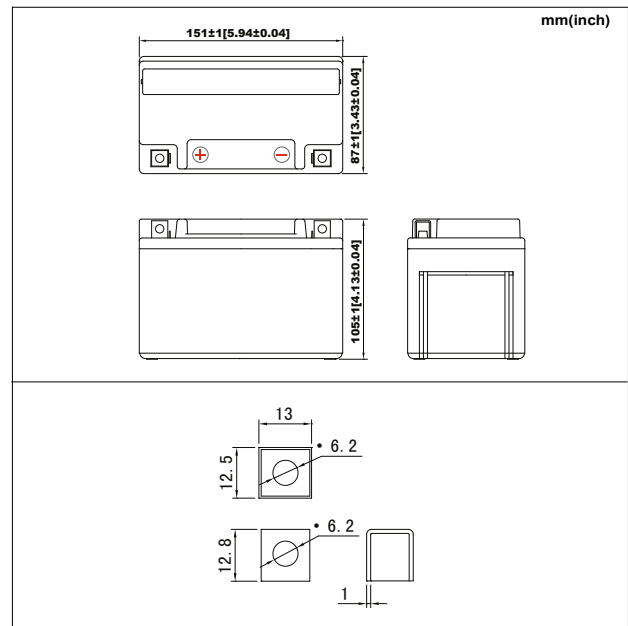

(V) FOR 12V BATTERY

Discharge Time VS. Discharge Current(25 °C)

