

ART. NR.: GB.5101377

ETN: GEL 510 0 13 009

DIN: 51013


CTX12A-BS

Specifications

Model NO.		CTX12A-BS DIN:51013 GEL:510013009
Same Dimensions As YUASA Model		YT12A-BS
Nominal Voltage		12V
Rated Capacity (10 hours rate)		10 AH
Dimension	Length	150 mm (5.90 inches)
	Width	87 mm (3.42 inches)
	Height	106 mm (4.17 inches)
	Total Height	106mm (4.17 inches)
Approx. Wight		Approx. 3.40kg (7.50Lbs)
Charge Current (A)		1.0A



Dimensions

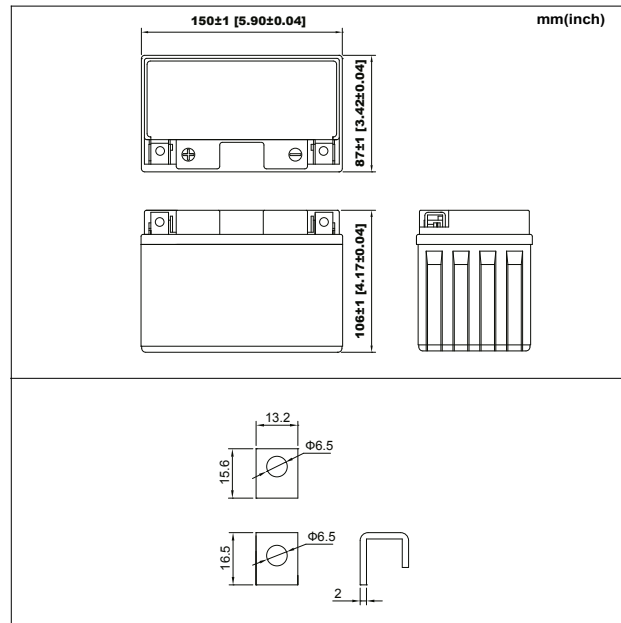

Characteristics

Capacity 25°C (77°F)	10hours rate (1.0 A to 10.5V)	10 Ah
	5hours rate (2.0 A to 10.2V)	8.5Ah
	1C (10 A to 9.6V)	4.5Ah
	3C (30A to 9.6V)	3.6Ah
Cold Cranking Amperes(-18°C SAE Standard)		75 A
Cold Cranking Amperes(-18°C EN Standard)		90 A
Internal Resistance (at 1KHz)		Approx.7.5mΩ
Operating Temperature Range	Charge	0°C (32°F) to 40°C (104°F)
	Discharge	-15°C (5°F) to 50°C (122°F)
	Storage	-15°C (5°F) to 40°C (104°F)
Life Expectancy (Cycle Use)	100% depth of discharge 200 cycles	
	80% depth of discharge 225 cycles	
	50% depth of discharge 500 cycles	
Charge Retention (shelf life) at 20°C (68°F)	1 month	92%
	3 month	90%
	6 month	80%
Standby Use	3~5 years	
Case Material	PP	

